


8PXW60-4-B – Datasheet

5V 60 pixel/ Meter RGBW pixel strip with black PCB.



ENTTEC 8PXW60-4-B is a 5v 60 pixel per meter addressable LED Pixel Strip designed for professional architectural and entertainment purposes, used to display smooth animated graphics achieving soft pastels and saturated colors on a large scale.

Cut and join into any conceivable shape.

It's black PCB makes it perfectly suited for direct view applications where it will be lost in the darkness when all pixels are off.

A fast 1.2KHz scan rate and 8-bit color depth means graphics and animations played back are smooth and consistently.

At ENTTEC, manufacturing quality and attention to detail is paramount. We always use thicker substrates to offer more durability, better heat dissipation and reduced voltage drop when compared to other LED strips available on the market.

Features

- RGB, 4 in 1 full color LED pixel strip.
- Premium flexible white 3oz copper PCB's.
- Individually addressable led pixels, suitable for stage, entertainment and architectural applications.
- 5V DC input supply voltage.
- SK6812 IC chips.
- 16.7 million possible shades.
- 120-degree illumination.
- 3M adhesive double side tape on the rear.
- Built-in data signal reshaping circuit.
- High 60 pixel/ meter LED density.
- Can be cut or joined at each copper tab.
- IP20 Indoor use only.
- Designed for use with ENTTEC pixel products.
- Maximum 13.5 Watts/Meter.

Specification

Connectors	2* 3Pin JST SM connectors (3A max)
IP rating	IP20
Input voltage	5v
Watts/meter (max)	13.5
Lumens/meter (max)	355
Efficacy (Lm/Watt)	26.3
DMX channels/pixel	4
Beam angle	120 °
Control protocol	SK6812 (compatible with WS28xx)
Scan rate	1.2KHz
Backup data line	No
Pixel mapping order	GRBW
White color temperature	4050K – 4250K
PCB color	Black
PCB width	10mm / 0.40"
Bend radius (Min)	30mm / 1.2"
Spacing between cuttable sections	16.6mm / 0.66"
Environmental operating temperature	0°C to 50°C 32°F to 122°F
Environmental operating humidity	5- 95% (non-condensing)
Weight (4m roll)	0.15Kg / 0.33lbs
Shipping dimensions (Single Roll)	235 * 210 * 15mm 9.25 * 8.27 * 3.66"
Shipping weight (Carton of 5 rolls)	0.80Kg / 1.76lbs
Shipping dimensions (Carton of 5 rolls)	260 * 225 * 93mm 10.24 * 10.04 * 3.66"
Warranty	1 year return to base manufacturer warranty

Certification



Box contents

- 1* 4m 8PXW60-4-B reel
- 1* 3Pin JST SM (3A max)
- Installation sheet

Connections

3PIN JST SM Connector (for testing only):


- 5V
- DI: Data In
- GND: 0V

Visit the ENTTEC knowledgebase for wiring guides.

Safety

- Ensure all cabling is rated to handle the current of each pixel strip section. ENTTEC recommend separate wiring soldered directly to the strip, to substitute the original JST SM connector for sections exceeding 3A current consumption.
- Make all connections and ensure your installation is appropriately fused before powering it.
- Handle with care and adhere to the LED Pixel Strip instruction sheet.
- Pixel strips produce heat; ensure proper thermal management by attaching to a thermally conductive surface and providing 150mm / 6" for convection.
- This product is intended for indoor use only. Do not expose to moisture, doing so will void the warranty.
- Never plug this product into a dimmer.

Colour Gamut

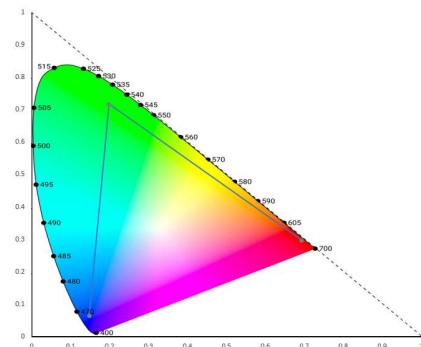

Ordering information

For further support and to browse ENTTEC's range of products visit the ENTTEC website.

Item	SKU
RGBW PIXEL STRIP 60 LEDs/METER 5V – 4-METER ROLL BLACK	8PXW60-4-B

enttec.com

MELBOURNE AUS / LONDON UK / RALEIGH-DURHAM USA

Due to constant innovation, information within this document is subject to change.